

cis32-ai — lecture # 21 — mon-24-apr-2006

today's topics:

- logic-based agents (see notes from last time)
- planning


What is Planning?

- Key problem facing *agent* is *deciding what to do*.
- We want agents to be *taskable*: give them *goals* to achieve, have them decide for themselves how to achieve them.
- Basic idea is to give an agent:
 - representation of goal to achieve;
 - knowledge about what actions it can perform; and
 - knowledge about state of the world;

and to have it generate a *plan* to achieve the goal.


- Essentially, this is

automatic programming.

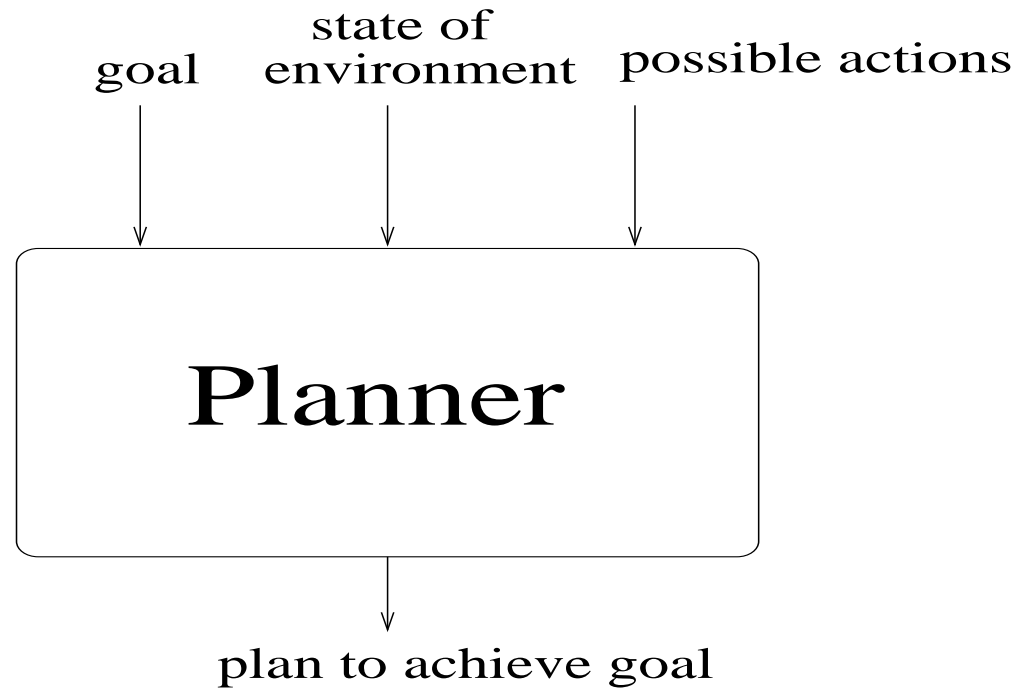

- Question: How do we *represent*...
 - goal to be achieved;
 - state of environment;
 - actions available to agent;
 - plan itself.
- We show how all this can be done in first-order logic...

- We'll illustrate the techniques with reference to the *blocks world*.
- Contains a robot arm, 3 blocks (A, B and C) of equal size, and a table-top.
- Initial state:

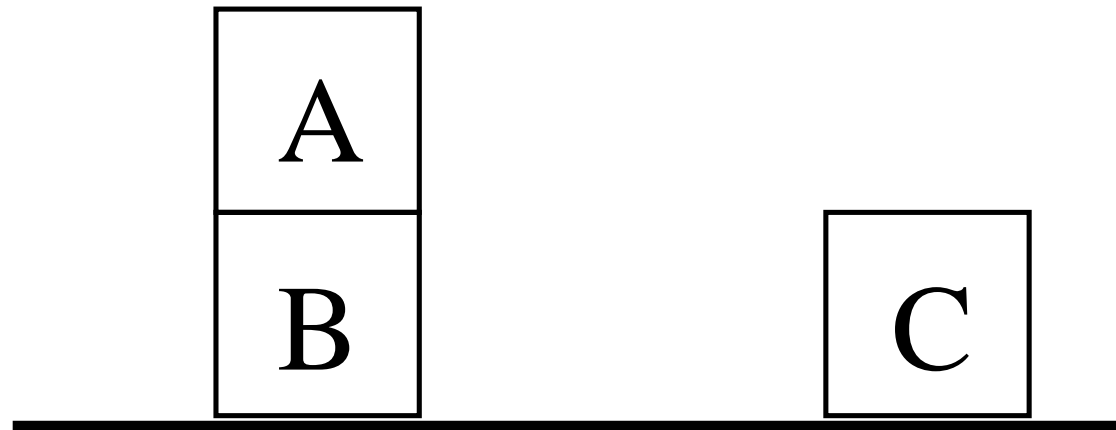

- To represent this environment, need an *ontology*.

On(x, y) obj x on top of obj y

OnTable(x) obj x is on the table

Clear(x) nothing is on top of obj x

Holding(x) arm is holding x

- Here is a first-order logic representation of the blocks world described above:

Clear(A)

On(A, B)

OnTable(B)

OnTable(C)


Clear(C)

- Use the *closed world assumption*: anything not stated is assumed to be *false*.

- A *goal* is represented as a first-order logic formula.
- Here is a goal:

$$OnTable(A) \wedge OnTable(B) \wedge OnTable(C)$$

- Which corresponds to the state:

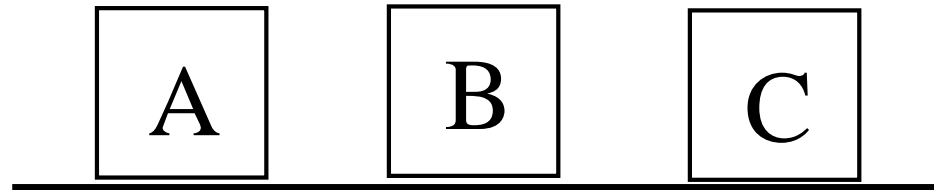

- *Actions* are represented using a technique that was developed in the STRIPS planner.

- Each action has:
 - a *name*
which may have arguments;
 - a *pre-condition list*
list of facts which must be true for action to be executed;
 - a *delete list*
list of facts that are no longer true after action is performed;
 - an *add list*
list of facts made true by executing the action.

Each of these may contain *variables*.

- Example 1:

The *stack* action occurs when the robot arm places the object x it is holding is placed on top of object y .

Stack(x, y)
pre $Clear(y) \wedge Holding(x)$
del $Clear(y) \wedge Holding(x)$
add $ArmEmpty \wedge On(x, y)$

- Example 2:

The *unstack* action occurs when the robot arm picks an object x up from on top of another object y .

$$\begin{array}{l} \text{UnStack}(x, y) \\ \text{pre } On(x, y) \wedge Clear(x) \wedge ArmEmpty \\ \text{del } On(x, y) \wedge ArmEmpty \\ \text{add } Holding(x) \wedge Clear(y) \end{array}$$

Stack and UnStack are *inverses* of one-another.

- Example 3:

The *pickup* action occurs when the arm picks up an object x from the table.

$$\begin{array}{l} \text{Pickup}(x) \\ \text{pre } \text{Clear}(x) \wedge \text{OnTable}(x) \wedge \text{ArmEmpty} \\ \text{del } \text{OnTable}(x) \wedge \text{ArmEmpty} \\ \text{add } \text{Holding}(x) \end{array}$$

- Example 4:


The *putdown* action occurs when the arm places the object x onto the table.

$$\begin{array}{l} \text{PutDown}(x) \\ \text{pre } \text{Holding}(x) \\ \text{del } \text{Holding}(x) \\ \text{add } \text{Holding}(x) \wedge \text{ArmEmpty} \end{array}$$

- What is a plan?

A sequence (list) of actions, with variables replaced by constants.

- So, to get from:

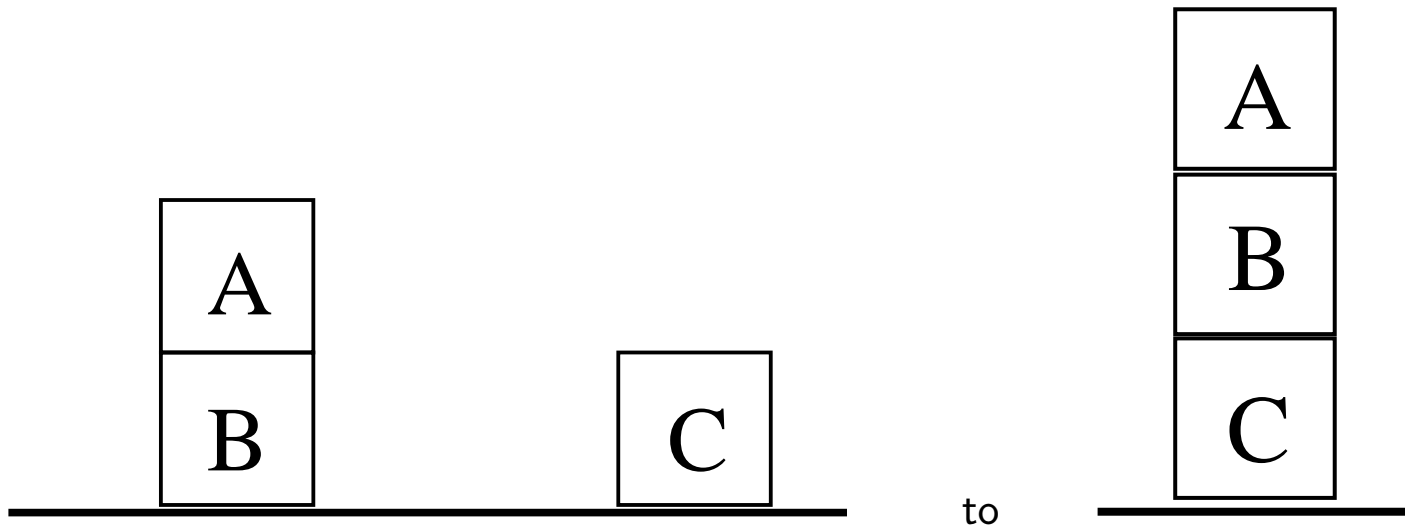

- We need the set of actions:

Unstack(A)

Putdown(A)

Pickup(B)

Stack(B, C)

Pickup(A)

Stack(A, B)

- In “real life”, plans contain conditionals (IF .. THEN...) and loops (WHILE... DO...), but most simple planners cannot handle such constructs — they construct *linear plans*.
- Simplest approach to planning: *means-ends analysis*.
- Involves backward chaining from goal to original state.
- Start by finding an action that has goal as post-condition.
Assume this is the *last* action in plan.
- Then figure out what the previous state would have been.
Try to find action that has *this* state as post-condition.
- *Recurse* until we end up (hopefully!) in original state.

```

function plan(
    d : WorldDesc,      // initial env state
    g : Goal,           // goal to be achieved
    p : Plan,           // plan so far
    A : set of actions // actions available)
1. if  $d \models g$  then
2.     return p
3. else
4.     choose a in A such that
5.          $add(a) \models g$  and
6.          $del(a) \not\models g$ 
7.     set  $g = pre(a)$ 
8.     append a to p
9.     return plan(d, g, p, A)

```


- How does this work on the previous example?

- This algorithm not guaranteed to find the plan. . .
- . . . but it is *sound*: If it finds the plan is correct.
- Some problems:
 - negative goals;
 - maintenance goals;
 - conditionals & loops;
 - exponential search space;
 - logical consequence tests;

The Frame Problem

- A general problem with representing properties of actions:

How do we know exactly what changes as the result of performing an action?

If I pick up a block, does my hair colour stay the same?

- One solution is to write *frame axioms*.


Here is a frame axiom, which states that SP's hair colour is the same in all the situations s' that result from performing $Pickup(x)$ in situation s as it is in s .

$$\forall s, s'. Result(SP, Pickup(x), s) = s' \Rightarrow \\ HCol(SP, s) = HCol(SP, s')$$

- Stating frame axioms in this way is unfeasible for real problems.
- (Think of all the things that we would have to state in order to cover all the possible frame axioms).
- STRIPS solves this problem by assuming that everything not explicitly stated to have changed remains unchanged.
- The price we pay for this is that we lose the advantages of using logic:
 - Semantics goes out of the window
- However, more recent work has effectively solved the frame problem (using clever second-order approaches).

Sussman's Anomaly

- Consider we have the following initial state and goal state:

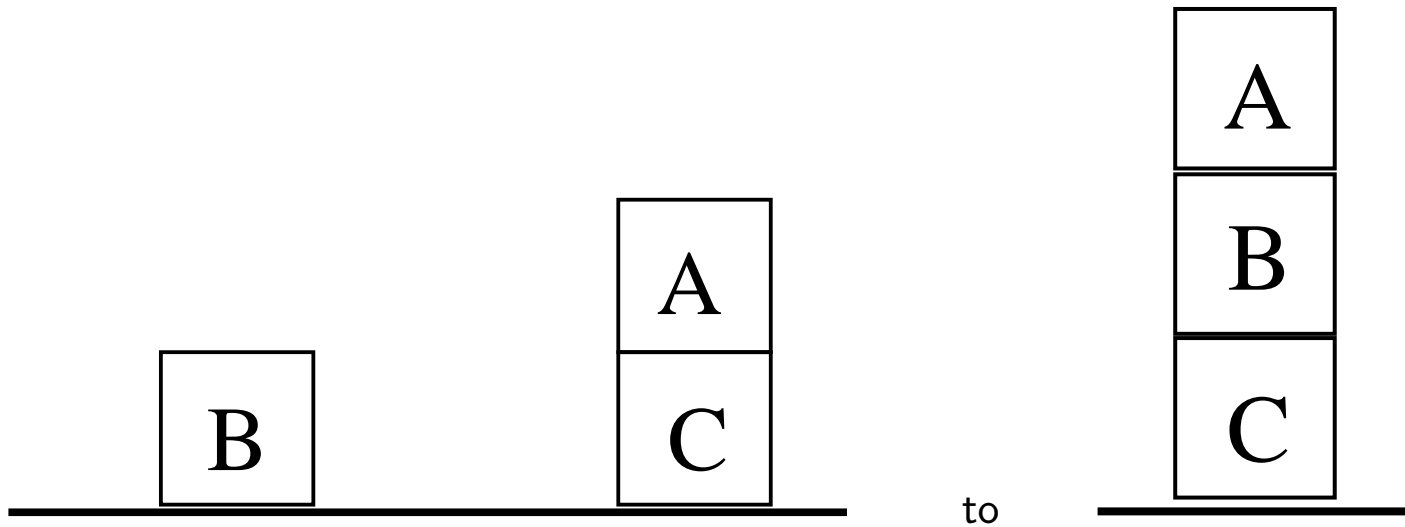

- What operations will be in the plan?

- Clearly we need to *Stack* B on C at some point, and we also need to *Unstack* A from C and *Stack* it on B.
- Which operation goes first?
- Obviously we need to do the *UnStack* first, and the *Stack B* on C, but the planner has no way of knowing this.
- It also has no way of “undoing” a partial plan if it leads into a dead end.
- So if it chooses to *Stack(A, C)* after the *Unstack*, it is sunk.
- This is a big problem with linear planners
- How could we modify our planning algorithm?

- Modify the middle of the algorithm to be:

1. if $d \models g$ then
2. return p
3. else
4. choose a in A such that
5. $add(a) \models g$ and
6. $del(a) \not\models g$
- 6a. $no_clobber(add(a), del(a), rest_of_plan)$
7. set $g = pre(a)$
8. append a to p
9. return $plan(d, g, p, A)$

- But how can we do this?
- We will give an answer in the next lecture.

Summary

- This lecture has looked at planning.
- We looked mainly at a logical view of planning, using STRIPS operators.
- We also discussed the frame problem, and Sussman's anomaly.
- Sussman's anomaly motivated some thoughts about partial-order planning.
- We will cover partial order planning in more detail in the next lecture.